

PASTILLÉ

Studded coating

Composition :
100% natural rubber


Advantages:

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Matt underside for adhesive laying

Laying: Glued flat with polyurethane glue.

Colour: black or grey - Other colours on request

+ info : Nitrile version on request

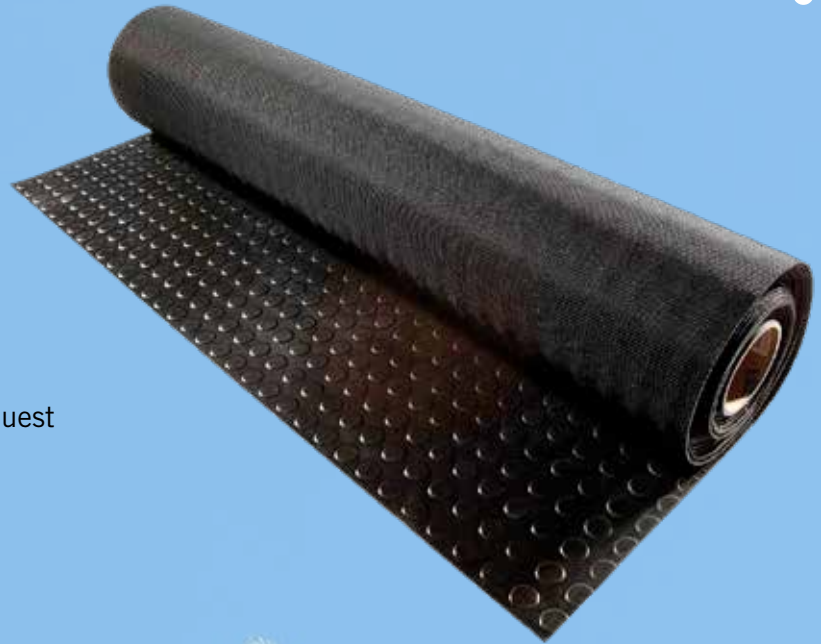

Black



Grey

Reference	Dimensions	Thickness	Weight	Fire classification
PAST100N3 (black)	1,0 x 10,0m	3 mm	3,9 kg/m ²	-
PAST120N3 (black)	1,2 x 10,0m	3 mm	3,9 kg/m ²	Cfl-S1
PAST120G3 (grey)	1,2 x 10,0m	3 mm	3,9 kg/m ²	-

Outdoors	Indoors	for gluing	Cfl-S1
100% RUBBER	100% rubber	Cleaning by single brush	Use up to -40°C
			UV resistant

CHECKER

Industrial rubber coating

Composition :
100% natural rubber

Advantages:

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Matt underside for adhesive laying

Laying: Glued flat with polyurethane glue.

Colour: black or grey - Other colours on request

+ info : nitrile version on request



Black



Grey

Reference	Dimensions	Thickness	Weight	Fire classification
CHECKER100N3 (black)	1,0 x 10,0m	3 mm	4,3 kg/m ²	-
CHECKER140N3 (black)	1,4 x 10,0m	3 mm	3,6 kg/m ²	-
CHECKER140N6 (black)	1,4 x 10,0m	6 mm	8,7 kg/m ²	Cfl-S1
CHECKER140G3 (grey)	1,4 x 10,0m	3 mm	3,8 kg/m ²	-
CHECKER140N3NBR (nitrile)	1,4 x 10,0m	3 mm	3,9 kg/m ²	-

Outdoors	Indoors	for gluing	100% RUBBER
Cfl-S1	100% rubber	Cleaning by single brush	Use up to -40°C
Ref: 140N6			UV resistant