

FINES STRIES

Streaked coating

Composition :

100% natural rubber


Advantages:

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Canvas printing on underside for adhesive laying
- Easy to cut


Laying: Glued flat with polyurethane glue.

Colour: black or grey - Other colours on request

+ info : nitrile version on request

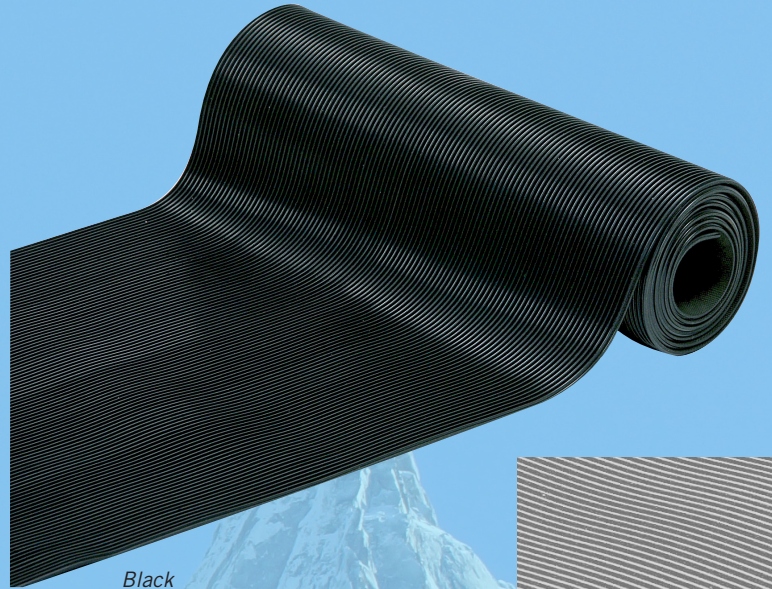

Black



Grey

Reference	Dimensions	Thickness	Weight	Fire classification
FINES100N (black)	1,0 x 10,0m	3 mm	3,3 kg/m ²	-
FINES120N (black)	1,2 x 10,0m	3 mm	3,3 kg/m ²	-
FINES120G (grey)	1,2 x 10,0m	3 mm	3,3 kg/m ²	-
FINES120NNBR (nitrile)	1,2 x 10,0m	3 mm	3,3 kg/m ²	-



Outdoors



Indoors



for gluing

100% RUBBER

100% rubber



Cleaning by single brush



-40°C
Use up to -40°C



UV resistant

CANNELÉ

Coating with wide grooves

Composition :


100% natural rubber

Advantages:

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Canvas printing on underside for adhesive laying
- Easy to cut

Laying: Glued flat with polyurethane glue.

Colour: black - Other colours on request

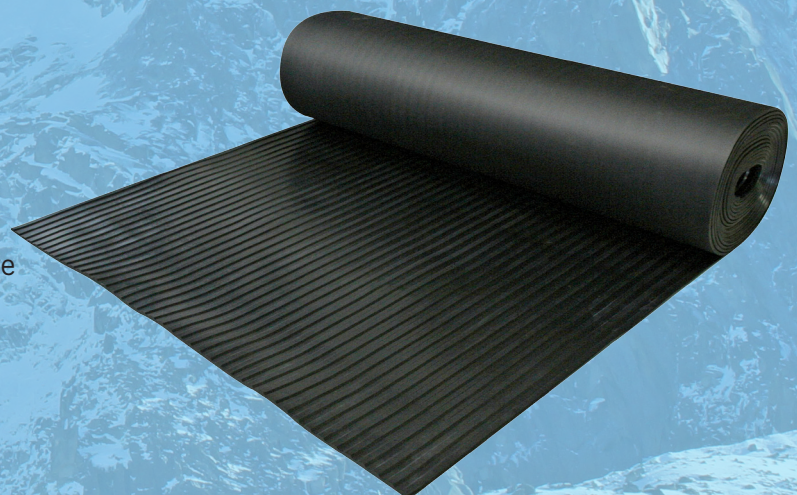

upper surface



Outdoors



Indoors



for gluing

100% RUBBER

100% rubber



Cleaning by single brush



-40°C
Use up to -40°C



UV resistant

Reference	Dimensions	Thickness	Weight	Fire classification
CANNELE100N6 (black)	1,0 x 10,0m	6 mm	6,5 kg/m ²	-
CANNELE120N6 (black)	1,2 x 10,0m	6 mm	6,5 kg/m ²	-