

HEAVY DUTY & DISABLED STANDARDS COMPLIANT

RUBBER GRATINGS M25 / M26

Ultra-tough grating, designed to meet disabled standards



6

© IDM

Composition : 100% non-recycled natural rubber

Advantages:

- Model conforming to the disabled standard LOGC940024A (Holes diameter must be less than 20 mm)
- Highly anti-slip: fine edges over the entire surface
- Edges bevelled to facilitate access (M2606)
- Very robust thanks to its density
- Upper face for total drainage of the water and snow
- Resistance to cuts from metal gratings
- Long service life

Colour: black - Other colours on request

+ info : custom cutting



junction C26


brushes

caps


Reference	Dimensions	Thickness	Weight	Fire classification
M25	100 x 150 cm	22 mm	21,0 kg	-
M25CFL	100 x 150 cm	22 mm	21,3 kg	Cfl - S1
M2601*	91 x 152 cm	22 mm	20,0 kg	-
M2601CFL*	91 x 152 cm	22 mm	21,5 kg	Cfl - S1
M2606	98 x 157 cm	22 mm	21,0 kg	-
C26			0,02 kg	-
BROSSEM26CC				-
BOUCHONM26				-

* Upon request

Non-binding photographs - Dimensions and weights are indicative - +/- 5% tolerance.

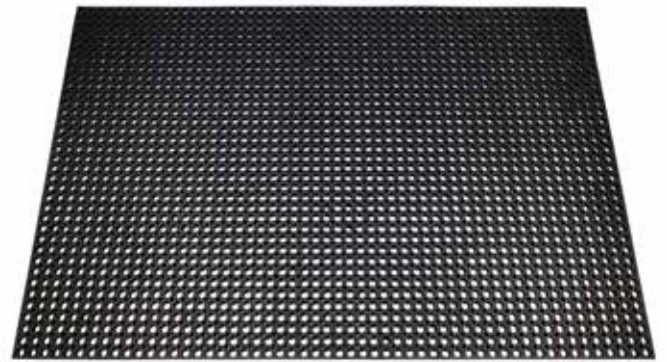

upper surface
Ø of the holes: 19 mm



lower surface