

TOGHOLA

Ultra-rugged gratings

Composition : 100% non-recycled natural rubber


Advantages:

- Very robust thanks to its density
- Large reinforced cells for total drainage of the water and snow
- Very anti-slip via its protruding cells
- Resistance to cuts from metal gratings
- Long service life


Colour: black - Other colours on request



M22 upper surface Thickness. 14 mm



M22 lower surface

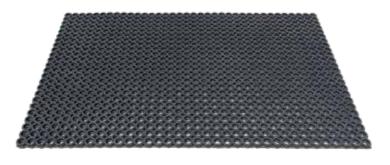

HEAVY DUTY, & ULTRA DRAINING



M69+ upper surface Thickness. 23 mm Ø of the holes: 29 mm

Non-binding photographs - Dimensions and weights are indicative - +/- 5% tolerance.



M69+ lower surface

| | | R10 | Bfl-S1 |
|-----------|--------------------|----------------------|--------------------------|
| ** | | R 10 | 100% RUBBER |
| Outdoors | for laying | Intensive traffic | 100% rubber |
| ▲ ◆ | -40°C | | |
| Draining | Use up to -40°C | UV resistant | High pressure washing |

| Reference | Dimensions | Thickness | Weight | Fire classification |
|-------------|--------------|-----------|---------|---------------------|
| M69PLUS | 100 x 150 cm | 23 mm | 20,0 kg | - |
| M69PLUS-BFL | 100 x 150 cm | 23 mm | 23,0 kg | BfI – S1 |
| M22 | 100 x 150 cm | 14 mm | 14,5 kg | - |