

Compact PRM rubber mat M25

R10 anti-slip honeycomb rubber mat, PRM compliant

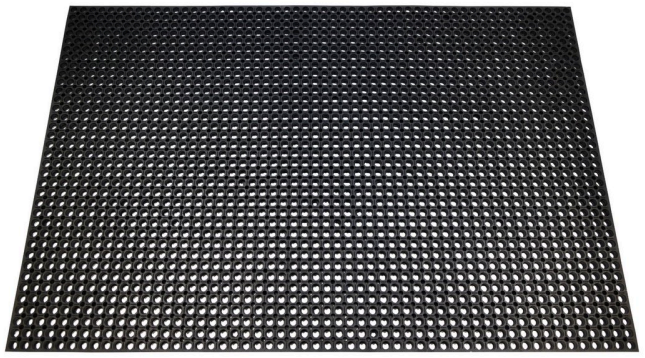

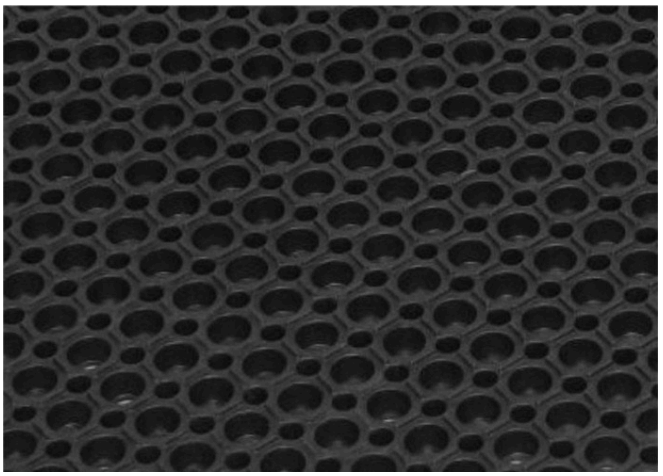

Top side

Dimensions	Thickness	Slip resistance
100 × 150 cm	**22.5 mm**	**R10 (DIN 51130)**

BENEFITS

- Thermal and acoustic insulation
- Draining effect, water drains away continuously
- Easy maintenance
- Anti-fatigue effect
- Installation without adhesive or tools
- R10 anti-slip surface

01 Technical specifications

GENERAL SPECIFICATIONS

Composition	100% natural rubber
Thickness	22.5 mm
Panel dimensions	100 × 150 cm
Structure	compact honeycomb, draining underside
Openings	less than 20 mm
Installation	no adhesive or tools, self-weighted panels
Operating environment	dry or wet, not compatible with oils

Continued on page 2 →

IDM (Industrie Développement Montagne), SAS au capital de 101 600 €, dont le siège social est situé Parc d'Activités Alpespace, 46 rue Saint-Exupéry, 73800 Porte-de-Savoie. SIREN 390 905 586 – RCS Chambéry – SIRET 390 905 586 00033 – TVA intracommunautaire FR59 390905586 – Code APE 46.69B – Président : Mount Hood MGMT.

Compact PRM rubber mat M25

R10 anti-slip honeycomb rubber mat, PRM compliant

01 Technical specifications (continued)

STANDARDS AND PROPERTIES

Slip resistance	R10 (DIN 51130)
Accessibility	PRM compliant (LOGC9400024A)
Fire rating	Cfl-s1 (CFL version)

REQUIRED FIRE RATING

Outdoors, outside buildings	no rating required
Ground level	standard level (Dfl)
Upper floor or step in a public building	Cfl-s1 mandatory

02 Variants

REFERENCE	DESIGNATION	DIMENSIONS	WEIGHT	FIRE RATING
00092	M25 rubber mat, standard	100 × 150 cm	19.8 kg/panel	—
00169	M25 rubber mat, CFL	100 × 150 cm	22.3 kg/panel	Cfl-s1

03 Description

Compact natural rubber mat designed to make pedestrian areas safe. Its fine ridges reduce the risk of slipping, and its openings of less than 20 mm make it compliant with PRM requirements.

Dimensions and weights are indicative, tolerance ± 5%.

INSTALLATION TIPS

- Join the panels with the C26 junction: 1 per corner and 1 every 50 cm along the edges, to keep them aligned under heavy traffic
- Self-weighted panels: no adhesive or fixing required

POINTS TO WATCH

- Indoors in a public building, choose the CFL version (Cfl-s1), mandatory as soon as a step is involved
- Natural rubber is not compatible with oils: dry or wet environments only
- Heavy panels (up to 22.3 kg): please plan for suitable handling

Continued on page 3 →

IDM (Industrie Développement Montagne), SAS au capital de 101 600 €, dont le siège social est situé Parc d'Activités Alpespace, 46 rue Saint-Exupéry, 73800 Porte-de-Savoie. SIREN 390 905 586 – RCS Chambéry – SIRET 390 905 586 00033 – TVA intracommunautaire FR59 390905586 – Code APE 46.69B – Président : Mount Hood MGMT.

Compact PRM rubber mat M25


R10 anti-slip honeycomb rubber mat, PRM compliant

04 Compatible accessories

REFERENCE	DESIGNATION	COLOUR	USE
00217	C26 junction	—	1 per corner and 1 every 50 cm along the edges
00542	Cap Ø 17 × 21.4 mm	Orange	Marking arrows, lines or text
00664	Cap Ø 17 × 21.4 mm	Yellow	Marking arrows, lines or text
07653	Cap Ø 17 × 21.4 mm	Green	Marking arrows, lines or text
00214	Rubber brush	Red	Enhanced scraping action
07929	Rubber brush	Blue	Enhanced scraping action
07930	Rubber brush	Green	Enhanced scraping action



C26 junction



Cap



Rubber brushes

IDM (Industrie Développement Montagne), SAS au capital de 101 600 €, dont le siège social est situé Parc d'Activités Alpespace, 46 rue Saint-Exupéry, 73800 Porte-de-Savoie. SIREN 390 905 586 – RCS Chambéry – SIRET 390 905 586 00033 – TVA intracommunautaire FR59 390905586 – Code APE 46.69B – Président : Mount Hood MGMT.