



Bike support Single Rack

Ref. : 07228



Developed on the Back Rack unloading and boarding principle, the Single Rack is particularly suitable for low capacity seats or seats with bodyguards with a very distant counterweight at the rear.

Compatible with disengageable and fixed installations, it allows very comfortable loading and unloading on clamp seats at up to 1.5 m/s. Unloading and boarding can be done by the customer or the operator depending on the operator's choice.

As the Single Rack is attached to the side of the seat, it does not require the counterweight of the guardrail to be in place. This advantage, combined with the fact that only one Mountain Bikes is used, avoids parasitic torsional stresses in the hook connection.

Thanks to the fact that it is essentially made of aluminium, its weight is very low (5-6 kg) and its impact on the transverse inclination of the seat is very limited (4° maximum on a 4-seater with 1 bare seat). Its low lateral offset avoids the risk of "mowing" users, particularly when the seat is moved in the contour.

Advantages of the system


- Economical and safe system
- Easy loading and unloading
- Suitable for all types and sizes of bikes
- Compatible with all types of chairlifts
- Does not interfere with the longitudinal gauge
- Lightweight with minimum transverse offset
- Quick and easy to assemble and disassemble
- Reduced storage space - easily transferred to other seat types
- Recognised by BDRM / BIRM and STRMTG



Bike support Single Rack

Ref. : 07228

Loading

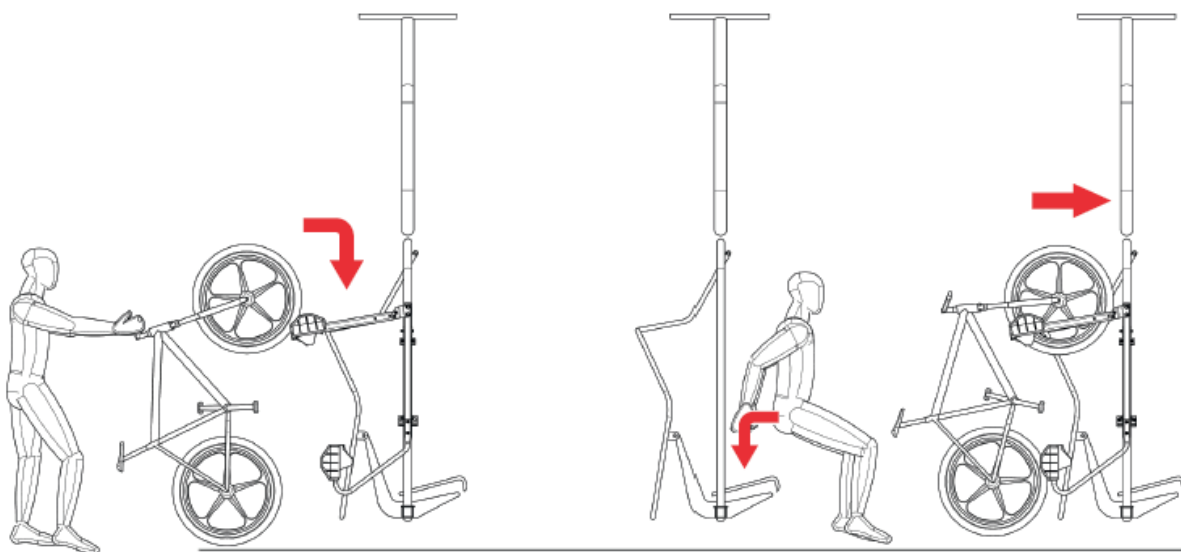

Unloading

